


# ASSEMBLY INSTRUCTIONS FOR LISTEC "P" MODEL PROMPTERS WITH FOLD-DOWN HOOD

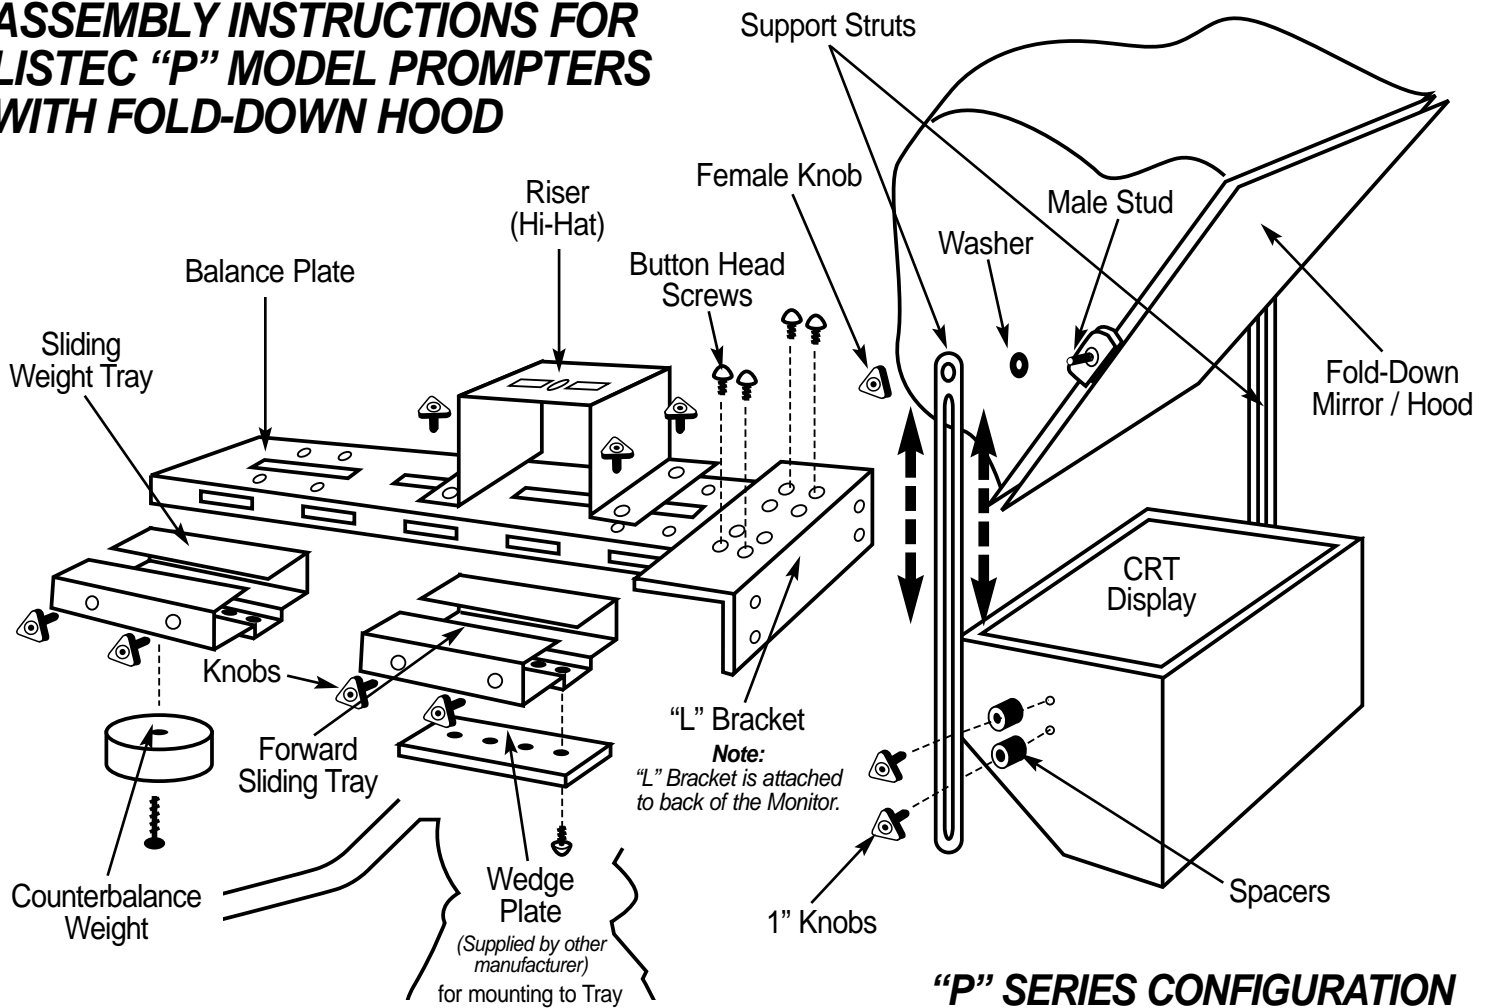

*Your Listec CRT Prompter has been supplied with the mounting hardware specified at the time of ordering. Monitors are supplied with an "L" Bracket attached. All hardware is compatible with previous Listec prompters.*

1. Remove the **Sliding Tray(s)** from the **Balance Plate**.
2. Attach the **Wedge Plate** (if applicable) to the **Forward Sliding Tray** and mount into the female adapter on the pan head, or screw the **Tray** onto the **Pan Head Bolt(s)**.
3. Slide **Balance Plate** over the **Sliding Tray** and secure with **Knobs** provided. Attach **Riser** to the **Balance Plate** as far forward as possible. Mount camera onto **Riser** with camera lens positioned as far forward as possible to avoid vignetting.
4. Attach the Monitor with the "**L**" **Bracket** to the **Balance Plate** with the four 3/8-16" x 3/4" **Button Head Screws** supplied.
5. Attach the **Counterbalance Weight** to the **Sliding Weight Tray** and insert into the **Balance Plate**, securing with the **Knobs** provided.
6. Attach the **Support Struts** to the side of the **Monitor** using the four **1" Knobs** and **Spacers** provided.
7. Attach the **Fold-Down Mirror / Hood** to the top of the **Support Struts**. Secure the assembly by screwing the **Female Knobs** through the **Support Struts** and **Washers** to the **Male Studs** on the **Hood**.
8. Plug in the power cable and connect composite video cables.

**Please Note:** Listec's 12 inch prompters can also accept 12VDC via a 4-pin male XLR connector.

**IMPORTANT:** Avoid touching the mirror. Do not use strong ammoniated cleansers.

## LISTEC VIDEO

TECHNICAL SUPPORT AND SALES:

Phone: (561) 683-3002 • Fax: (561) 683-7336 • [www.listec.com](http://www.listec.com)